

PRODUCT

Disposable Antistatic Cleanroom Lab Coat - Knitted Cuff

603-0070
DESCRIPTION

Integrity Cleanroom clothing products are designed and manufactured to meet the stringent demands of the cleanroom industry. Manufactured from a lightweight, low linting material, our products provide excellent comfort, breathability and water vapour transmission rates. Our products are CE marked to PPE Standard Category 3, Type 5 & 6 offering a cost effective option for your disposable clothing requirements.

FEATURES


- ISO 6 and above
- Antistatic
- Knitted cuffs
- Low linting levels
- Available sterile by gamma irradiation
- Zip closure



PRODUCT CODE	DESCRIPTION	SIZE	QUANTITY
603-0070	Antistatic Cleanroom Lab Coat	M	Each
603-0071	Antistatic Cleanroom Lab Coat	L	Each
603-0072	Antistatic Cleanroom Lab Coat	XL	Each
603-0073	Antistatic Cleanroom Lab Coat	XXL	Each

To request a quotation or for more information, please call **+1 512-713-0127**
 email sales@integritycleanroom.com or visit www.integritycleanroom.com

IMPORTANT: This data sheet and its contents (the "Information") belong to Integrity Cleanroom or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Integrity Cleanroom assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Integrity Cleanroom was aware of the possibility of such loss or damage arising) is excluded. © Integrity Cleanroom.

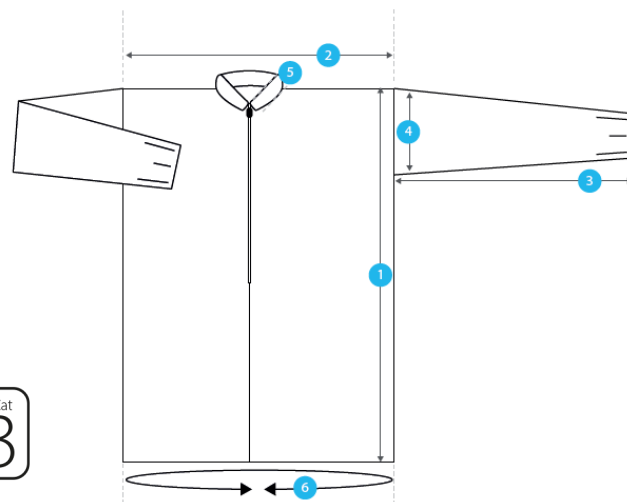

SIZE	OVERALL LENGTH	CHEST LENGTH	SLEEVE LENGTH	SLEEVE OPENING WIDTH	COLLAR WIDTH	OVERALL WIDTH	ANTISTATIC
	1	2	3	4	5	6	
S	104.14	55.88	45.72	26.87	6.35	121.92	NO
M	108	65	57	26	8	134	YES
L	110	67	57	26	8	138	YES
XL	112	71	57	26.5	8	142	YES
XXL	114	73	57	26.5	8	146	YES
TOLERRANCE +/-	5	2.5	1.3	1.3	1.3	5	

DESCRIPTION	INTEGRITY RESULT	TEST PROCEDURE PGI STANDARD	REF TEST PROCEDURE ASTM STANDARD
Basis weight oz/yd	1.5	D3776	D3776
Thickness Mills	6.77	D1777	D1777
Strip tensile (MD/CD) lbs/in	8.73/6.22	D1682	D1682
Strip elongation (MD/CD) %	112/107	D1682	D5034
Work to break in - lbs	20.38/12.13	D1682	D1682
Work up to Fmax. (MD/CD) in - lbs	18.55/10.83	D1682	
Tongue tear (MD/CD) lbs	15.25/9.62		DASTM D2261
Flammability	Class 1		CS-191-53, Sec. 1610
Mullen burst lbs/sq in	83		
Particulate burden	none		
Shrink temp F°/C°	270/135		
Melt temp F°/C°	275/135		
Water vapour transmission gm/24hrs	1302		ASTM E96 - 2006

To request a quotation or for more information, please call **+1 512-713-0127**
 email sales@integritycleanroom.com or visit www.integritycleanroom.com

IMPORTANT: This data sheet and its contents (the "Information") belong to Integrity Cleanroom or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Integrity Cleanroom assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Integrity Cleanroom was aware of the possibility of such loss or damage arising) is excluded. © Integrity Cleanroom.

TEST RESULTSurface Resistivity of Fabric (EN 1149-1:2006)

Test Conditions: Applied Voltage and time: 100V for 16 seconds

Temperature 23± 1°C, Relative Humidity 25 ± 5%

Surface Resistivity: Non-woven: 1.4 x 1010 Ohms
Coating: 2.9 x 1010 Ohms

Air Permeability of Textile Fabrics (ASTM D737-2004; TEXTTEST FX3300 Air Permeability Tester III)

Test pressure: 125 pa
Test area: 38 sq cm

Individual Readings (Unit : cfm): 1: 0.230
2: 0.227
3: 0.239
4: 0.251
5: 0.234

Commentary: -
Average: 0.236
Minimum: 0.227
Maximum: 0.251
CV%: 4.0

Tensile Strength (ASTM D6034-2001; Instron CRE - 1" Grab)

Length (lb): 4.7
Width yarns torn (lb): 5.2

Notes: Warp test - test in which the warp yarns are torn.
Weft test - test in which the weft yarns are torn.

Bursting Strength (ASTM D3787-1989; Instron ball bursting)

lbf : 25.9

Water Vapour Transmission of Textiles Fabrics (ASTM E96 2005)

Procedure B: Inverted Water Method at 73.4°C (23°C) &
50±2% RH

Tested Area: 0.003117 square metre
Orientation : Back side : Facing Water
Grams per square metre per 24 hours 1302

Fabric Weight per Unit Area (ASTM D3776-2002; option C)

(oz/yd2): 1.9
(g/m2): 66

Water Resistance* (ASTM D751-2000 ; Hydrostatic Head)

Water column (mm): 1616.7

****End of report****

To request a quotation or for more information, please call **+1 512-713-0127**
email sales@integritycleanroom.com or visit www.integritycleanroom.com

IMPORTANT: This data sheet and its contents (the "Information") belong to Integrity Cleanroom or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Integrity Cleanroom assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Integrity Cleanroom was aware of the possibility of such loss or damage arising) is excluded. © Integrity Cleanroom.