



Learning about Contamination Control - Part 1:

The Basics of a Cleanroom



Contents

What is a Cleanroom?

The basics_____	3
How big is a micron?_____	3

What is Cleanroom Contamination?

Types of contaminants_____	
Viable_____	4
Non- viable_____	4
Facts about contaminants_____	4
Important cleanroom reminders_____	4
Cleanroom classification comparison table	5
Recommended air velocity rates	6
Recommended ceiling filter coverage_____	6

Call one of our ESD experts: +1 512-713-0127

What is a Cleanroom?

The basics

A cleanroom is a controlled environment designed to minimize the presence of airborne particles, dust, contaminants and other impurities. It is commonly used in industries such as semiconductor manufacturing, pharmaceuticals, biotechnology, aerospace, and electronics, where even small particles or contaminants can have a significant impact on the production process or the final product. The use of cleanrooms helps ensure the quality, reliability, and performance of products that require a pristine environment for manufacturing, testing, or research.


Eliminating sub-micron airborne contamination is a process of control. Airborne contaminants are generated by:

- People
- Processes
- Facilities
- Equipment

Contaminants must be continually removed from the air in order to keep the area clean.

The amount of air particles permitted varies according to the standard to which your cleanroom has been certified. Cleanrooms are classified based on the maximum allowable particle count per cubic meter of air, according to international standards such as ISO 14644-1.

How big is a micron?

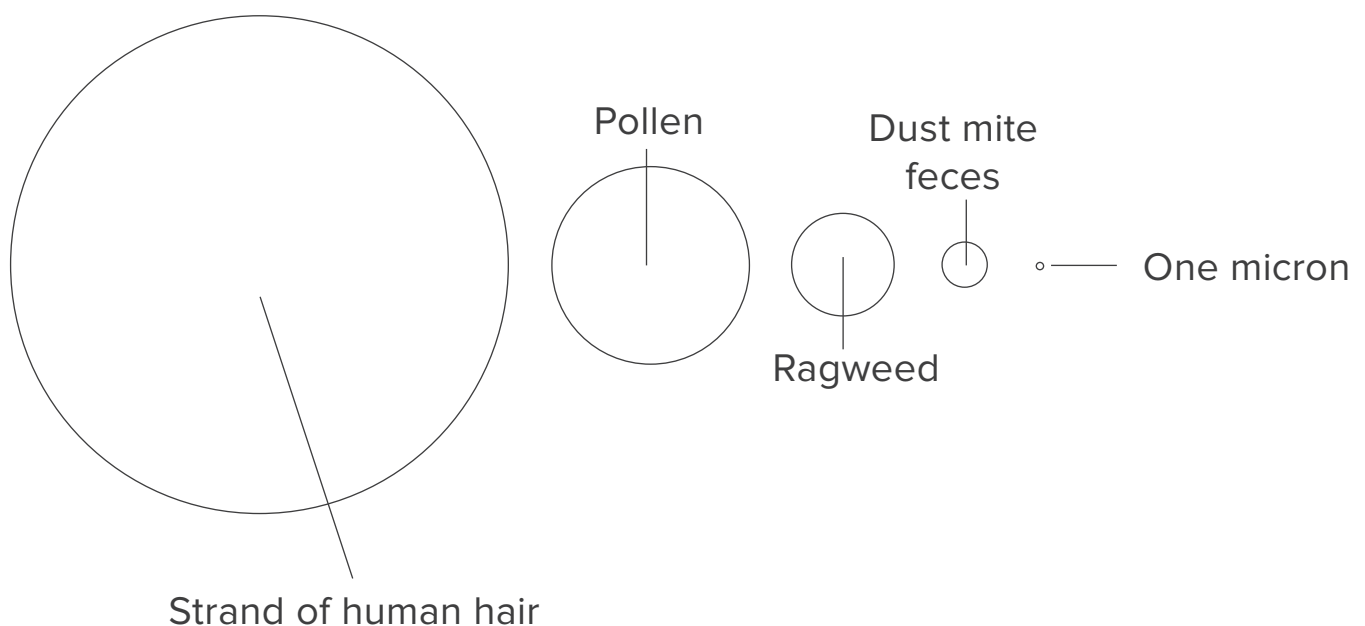

What is Cleanroom Contamination?

Types of contaminants

There are two types of contaminants:

1. Viable

Examples: Bacteria, viruses, fungal spores, molds and yeast

Sources: People, outside air, water, equipment, tools, excipients, active ingredients

2. Non-viable

Examples: Metal specks or flakes, clothing fibers, dead skin, hairs

Sources: People, equipment and tools

Facts about contaminants

1. An adult human will lose about 6-14 grams of dead skin material every day, and lose a complete layer of skin about every four days, which is equivalent to 10,000,000 particles per day.
2. In a cleanroom, an adult will generate 100,000 particles per minute when motionless (fully gowned), and will generate 1,000,000 particles per minute when walking in the cleanroom.
3. According to several sources, approximately 75% to 80% of all particles generated in a cleanroom are from manufacturing personnel. About 15% comes from ventilation, and the remaining contamination comes from the room structure, equipment, and various other processes.

Important cleanroom reminders

- All materials entering the cleanroom should be wiped down before entering.
- If any of the materials going into the cleanroom are contained in a cardboard box, they should be removed from the box and placed either in a plastic bag or cleanroom tote box before entering the cleanroom.
- Trolleys/carts etc. if used beyond the cleanroom should be wiped down before entering the cleanroom – this includes castors.
- Individuals working in cleanrooms are required to follow strict protocols and wear special clothing such as coveralls, gloves, masks, and shoe covers.

Call one of our ESD experts: +1 512-713-0127

Cleanroom classification comparison table

Cleanrooms are classified based on the maximum allowable particle count per cubic meter of air, according to international standards such as ISO 14644-1.

The table below shows a comparison of different classifications. The Federal Standard 209E classification of cleanrooms was replaced in 2001 by ISO 14644, however, is listed below as it is still widely used.

Different classifications are given within different countries; EU GMP (Good Manufacturing Practice) is mainly used within Europe while ISO and Federal Standard are used worldwide.

The classification ranges from ISO Class 1 (the cleanest) to ISO Class 9 (the least clean). Each class has specific requirements for airborne particle limits.

CLEANROOM STANDARD	CLEANROOM CLASSIFICATION GUIDELINES						
ISO 14644-1	ISO 1-2	ISO 3	ISO 4	ISO 5	ISO 6	ISO 7	ISO 8
EU GMP (at rest)*	-	-	-	A/B	-	C	D
Federal Standard 209E	-	1	10	100	1000	10,000	100,000

* “at rest” corresponds to the maximum permitted number of particles when the cleanroom is not in operation.

Note: While ISO 9 does exist, it does not have specifications as found with other ISOs and so is not usually listed.

Cleanrooms are constructed to maintain a high level of cleanliness by controlling factors such as air quality, temperature, humidity, and pressure. They typically have specialized ventilation systems that filter the air to remove particles and maintain a positive or negative air pressure to prevent the entry of contaminants from outside.

HEPA (High Efficiency Particulate Air) filters required for all cleanrooms of ISO 5 and upwards.

ULPA (Ultra Low Penetration Air) filters required for ISO 3 and 4 upwards applications.

Recommended air velocity rates

ISO 14644-1 / FS209E

CLASS ISO 146144-1 (STANDARD 209E)	AVERAGE AIR FLOW VELOCITY (M/S)	AIR CHANGES PER HOUR
ISO 8	0.005 - 0.041	5 - 48
ISO 7	0.051 - 0.076	60 - 90
ISO 6	0.127 - 0.203	150 - 240
ISO 5	0.203 - 0.406	240 - 480
ISO 4	0.254 - 0.457	300 - 540
ISO 3	0.305 - 0.457	360 - 540
ISO 1-2	0.305 - 0.508	360 - 600

Recommended ceiling filter coverage

ISO 14644-1 / FS209E

CLASS	CEILING COVERAGE
ISO 8	5 - 15%
ISO 7	15 - 20%
ISO 6	25 - 40%
ISO 5	35 - 70%
ISO 4	50 - 90%
ISO 3	60 - 100%
ISO 1-2	80 - 100%

Note: Actual average velocity and air changes required may vary depending on the application and floor plan, including ceiling height.



Follow the QR code for our full range of cleanroom consumables. For more information please talk to our expert team.

Call one of our ESD experts: +1 512-713-0127

Notes:

[illegible]



ISO 9001 QUALITY ASSURED

We are focused on meeting our customer's expectations and delivering exceptional customer satisfaction.

CUSTOMER FOCUSED APPROACH

With over 35 years' experience, our service culture is the very core of our customer's success.

STANDARD OF EXCELLENCE

From beginning to end our team of knowledgeable experts are here to help.

ADDRESS

ANTISTAT Inc. 1000 Heritage Center Circle,
Round Rock, Texas 78664 US

CONTACT US

+1 512-713-0127 | sales@integritycleanroom.com | www.integritycleanroom.com

+1 512-580-4220 | sales@antistat.com | www.antistat.com

ANTISTAT INC.

Registered: TEXAS 802169334 EIN: 47-3354006

Integrity Cleanroom and Antistat Inc. are trading divisions of ESD Control Centre Limited. Ant Group is the parent company of ESD Control Centre Limited.

© Copyright 2024 Ant Group Limited. Permission granted to reproduce for internal use only.
Commercial copying, hiring, lending is prohibited.

Updated January 2024

